



07-28-00

U.S. Department of Commerce
Patent and Trademark Office
PATENT

A

UTILITY PATENT APPLICATION TRANSMITTAL

Assistant Commissioner for Patents
Washington, D.C. 20231
BOX PATENT APPLICATIONAttorney Docket No.: PA000330
Date: July 26, 2000
Express Mail Label No.: EK800731347US

Dear Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): Chen, et al.For: Page Monitoring Method and Apparatus

Enclosed are:

1. ☒ Patent application (16) total pages.
2. ☒ Drawings: ☐ Formal () sheet(s) or ☒ Informal (5) sheet(s).
3. ☒ Declaration/Power of Attorney: ☐ Signed ☒ Unsigned
4. ☐ An Assignment () pages and Recordation Form Cover Sheet.
5. ☐ A Preliminary Amendment () pages.
6. ☐ Information Disclosure Statement (IDS):
 - a. ☐ PTO-1449
 - b. ☐ Copies of IDS Citations (number of citations:)
7. ☐ Other:

CLAIMS:	(a) Filed	(b) Extra Claims	Large Entity Fee	Fee Paid
Total*	11 - 20	0	x \$18 =	\$0.00
Independent**	3 - 3	0	x \$78 =	\$0.00
Multiple Dependent Claim(s): <input type="checkbox"/> No <input type="checkbox"/> Yes			\$260	\$
APPLICATION FILING FEE			\$690	\$690.00
TOTAL FEE				\$690.00

*If the number in column a is less than 20, enter 0 in column b.

**If the number in column b is less than 3, enter 0 in column b.

8. ☐ A check in the amount of \$_____ is enclosed to pay the filing fee.
9. ☒ Please charge Deposit Account No. 17-0026 of QUALCOMM Incorporated the amount of \$690.00. The Commissioner is hereby authorized to charge payment of any additional fees which may be required, or credit any overpayment, to said Deposit Account No. 17-0026. A duplicate of this sheet is enclosed for fee processing.
10. ☒ The Commissioner is further hereby authorized to charge to said Deposit Account No. 17-0026, pursuant to 37 CFR 1.25(b), any fee whatsoever which may become properly due or payable, as set forth in 37 CFR 1.16 to 37 CFR 1.18 inclusive, for the entire pendency of this application without specific additional authorization.

Date: July 26, 2000Signature: S. Hossain Beladi
S. Hossain Beladi, Reg. No. 42,311QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, California 92121-1714
Telephone: (858) 651-4470
Facsimile: (858) 658-2502

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of)
CHEN, ET AL.) For: Page Monitoring Method and
Serial No. Unknown) Apparatus
Filed: Herewith) Group Art Unit: Unknown

JC973 U.S. PTO
09/625777
07/26/11

CERTIFICATE OF MAILING UNDER 37 CFR § 1.10

Asst. Commissioner of Patents
BOX PATENT APPLICATIONS
Washington, D.C. 20231

Dear Sir:

"Express Mail" mailing label No. EK800731347US
Date of Deposit JULY 26, 2000

I hereby certify that the following papers are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and is addressed to the Asst. Commissioner of Patents, Box Patent Applications, Washington, D.C. 20231:

PATENT APPLICATION IN 16 PAGES; TRANSMITTAL LETTER IN DUPLICATE; 5 SHEETS OF INFORMAL DRAWINGS; UNSIGNED DECLARATION/POWER OF ATTORNEY; AND POSTCARD

Kayla R. Seignious

(Name)

Kayla R. Seignious

(Signature)

QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, California 92121-1714
Telephone: (858) 845-3313
Facsimile: (858) 658-2502

PAGE MONITORING METHOD AND APPARATUS

BACKGROUND

5

I. Technical Field

The present invention relates to wireless communications. More particularly, the present invention relates to a novel and improved method and apparatus for monitoring page messages in spread spectrum communications.

II. Background

In U.S. Patent Application Serial No. 08/316,177, entitled "Multipath Search Processor For A Spread Spectrum Multiple Access Communication System" (the '177 application), incorporated by reference herein and assigned to the assignee of the present invention, a searcher for detecting spread spectrum signals is described. The searcher is particularly suited for use in a CDMA based digital cellular telephone system to identify pilot channels transmitted within the CDMA system. Once the pilot channel is identified, the telephone, or "subscriber unit," uses the associated timing information to perform functions such as monitoring for page messages and conducting communications.

The searcher according to the '177 application typically works in combination with a set of finger elements and a decoder placed on a single integrated circuit. Together, the components perform the processing necessary for CDMA communications and page monitoring. For example, to receive a CDMA signal the searcher does pilot channel searching at various offsets in time. Once a pilot channel is detected, the finger elements are activated to process an associated data channel, such as a paging channel or a traffic channel. To perform the searching and the signal processing, the searcher and finger elements receive samples generated in response to RF signals received by the subscriber unit. The samples are typically generated by an RF/IF unit within the mobile phone or subscriber unit.

In general, it is desirable to reduce the power consumption of a subscriber unit to reduce the battery size and weight. Additionally, it is desirable to increase the reliability with which pages and other messages are received and processed by the subscriber unit.

SUMMARY OF THE INVENTION

The presently disclosed method and apparatus are directed to a novel and improved technique monitoring and receiving on one or more paging channels. In one aspect of the invention, a searcher is used to detect spread spectrum signals. The searcher advantageously searches several pilot channels associated with several base stations. A controller selects at least two base stations that have associated pilot signal energies exceeding a threshold. A demodulator demodulates paging channels transmitted by the at least two base stations. The paging channels are advantageously transmitted over substantially overlapping time slots. A combiner combines a result of the demodulation generated by demodulating each of the paging channels.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 depicts a cellular telephone system configured in accordance with an embodiment of the invention;

FIG. 2 depicts a block diagram of a receiver portion of a subscriber unit configured in accordance with an embodiment of the invention;

FIG. 3 depicts a flow chart illustrating the processing steps performed within a subscriber unit when performed in accordance with an embodiment of the invention;

FIG. 4 depicts a block diagram of a searcher when configured in accordance with an embodiment of the invention; and

FIG. 5 depicts an example of a pilot signal E_c/I_o fluctuation between transmissions of quick paging channels and paging channels.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS

A novel and improved method and apparatus for detecting paging messages are described. The exemplary embodiment described herein is set forth in the context of a digital cellular telephone system. While use within this

context is advantageous, different embodiments of the invention may be incorporated in different environments or configurations. In general, the various systems described herein may be formed using software-controlled processors, integrated circuits, or discrete logic. Implementation in an integrated circuit is advantageous. The data, instructions, commands, information, signals, symbols, and chips that may be referenced throughout the application are advantageously represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical fields or particles, or a combination thereof. In addition, the blocks shown in each block diagram may represent hardware or method steps.

Fig. 1 is a block diagram of a cellular telephone system configured in accordance with one embodiment. Mobile telephones and other communication systems (subscriber units) 10 are located among base stations 12, which are coupled to a base station controller (BSC) 14. Mobile switching center (MSC) 16 connects BSC 14 to the public switch telephone network (PSTN)/public data system network (PDSN) 18. BSC 14 may be connected to other base station controllers (not shown for simplicity). Similarly, MSC 16 may be connected to other base station controllers and mobile station controllers (not shown for simplicity). During operation, some mobile telephones 10 conduct telephone calls by interfacing with base stations 12 while others are in an idle, or standby, mode in which they monitor for page messages.

In accordance with the use of some CDMA communications protocols, a subscriber unit 10 can simultaneously interface with two base stations 12 in soft handoff. A system and method for operating a cellular telephone using CDMA techniques is described in U.S. Patent No. 5,103,459 entitled "System and Method for Generating Signal Waveforms in a CDMA Cellular Telephone System", (the '459 patent), assigned to the assignee of the present invention and incorporated by reference herein. The system of the '459 patent is configured substantially in accordance with the use of the IS-95 over-the-air interface standard.

Additionally, in one embodiment of the invention, paging of a subscriber unit 10 is performed substantially in accordance with the paging method described in U.S. Patent Applications Serial Nos. 08/865,650 and 08/890,355, both entitled "Dual Channel Slotted Paging," (the dual channel paging applications), assigned to the assignee of the present invention and incorporated by reference herein, and wherein the use of a quick paging message (quick page) transmitted over a reduced encoding channel is

described. One or more quick pages are transmitted before the full page message (full page) to allow a subscriber unit to reduce page monitoring time, and therefore reduce standby power consumption. Generally, if the subscriber unit does not receive a positive quick page, then it does not monitor for the full page, thereby reducing idle mode power consumption.

Fig. 2 is a block diagram of a demodulator used for processing CDMA signals in accordance with one embodiment of the invention. Receive (Rx) samples are generated by radio frequency/intermediate frequency (RF/IF) system **190** and antenna system **192**, which receive RF signals, filter, downconvert, and digitize the RF signals to baseband. The samples are supplied to mux **202** and sample RAM **204**. The output of mux **202** is supplied to searcher unit **206** and finger elements **208**, which are coupled to control unit **210**. Combiner **212** couples decoder **214** to finger elements **208**. Typically, control unit **210** is a microprocessor controlled by software, and may be located on the same integrated circuit or on a separate integrated circuit.

During operation, receive samples (samples) are stored in sample RAM **204** and applied to mux **202**. Mux **202** supplies either real time samples or the stored sample to searcher unit **206** and finger elements **208**. Control unit **210** configures finger elements **208** to perform demodulation at different time offsets based on search results from searcher unit **206**. The results of the demodulation are combined in combiner **212** and passed to decoder **214**, which outputs the data.

In general, the searching performed by searcher **206** uses non-coherent demodulation of the pilot channel to test timing hypotheses corresponding to various sectors, base stations and multi-paths, while the demodulation performed by finger elements **208** is performed via coherent demodulation of the data channel. Non-coherent demodulation does not require carrier phase information, but detects signal energy rather than the data contained in the signal (for certain waveform types). Throughout this application, the term demodulation alone refers to coherent demodulation, while searching refers to non-coherent demodulation. In one embodiment of the invention, despreading is performed by multiplying the received samples with the complex conjugate of the PN sequence and assigned Walsh function at a single timing hypothesis and digitally filtering the resulting samples, often with an integrate and dump accumulator circuit.

The demodulation and searching can be performed at various time offsets, and the results of the demodulation are combined to determine if a page

message was received. Advantageously, the page channel demodulated by searcher is similar to the quick paging channel described in the dual channel paging applications referenced above. As the message duration is small for quick paging (128 or 256 PN chips at 1.2288 Mega chip per second (Mcps) is 104 or 208 microseconds) and the necessary de-skew is small, (about 100-400 microseconds) the required received samples can be readily buffered and processed "off-line" to save power.

Fig. 3 is a flow chart illustrating the operation of the demodulator of **Fig. 2** during idle mode in accordance with an embodiment of the invention. Idle mode is the state in which the subscriber unit is powered up but not making a call. During idle mode the subscriber unit monitors for paging messages directed to it. The paging message may indicate an incoming communication or telephone call.

At step **300**, the subscriber unit collects and stores received samples during the quick paging slot assigned to it. In one embodiment, the collection is performed by activating the RF/IF system **190**, storing the samples in the sample RAM, and then deactivating the RF/IF system **190**. Typically the subscriber unit collects samples for a longer duration than that of a single quick paging slot so that multiple time offset signals are stored within the set of received samples. In another embodiment, the samples pass to searcher unit **206** in real time without being stored.

At step **304** searcher unit **206** (of **Fig. 2**) performs pilot searching on the samples at various time offsets. Additionally, pilot searching may be performed for different signals. For example, searching may be performed for signals from different base stations that use different, or differently offset, pilot codes. When a local maxima is detected above a certain threshold, and the combine function is enabled for the particular search window, the resulting hypothesis is demodulated and combined. Once all the hypotheses in a search list have been completed, the step is done.

In one embodiment of the invention, it is advantageous to have samples large enough to cover the time offset of a set of multipath signals. Thus, by simply searching the same set of samples at different offsets, different pilots may be detected. Similarly, the same set of samples may be demodulated at different offsets to process quick pages. While a quick page channel designed for coherent signaling provides better performance, and therefore is advantageous in many instances, a quick paging system may be designed for non-coherent signaling as well.

At step 306, searcher 206 is switched to demodulation mode, and the paging channel associated with each signal detected during search mode is demodulated to determine if a quick page has been received. The quick pages are processed by performing coherent demodulation on the set of paging channels corresponding to the set of pilot channels detected during searching. Thus, in one embodiment of the invention, the quick page channel is demodulated within the searcher after the searching is performed. Each demodulation is performed at a particular offset within the samples, and the resulting set of demodulation soft decision data is diversity combined using an accumulator within searcher 206.

At step 308 the combined demodulation data is examined to determine if a positive quick page has been received (i.e., one indicating that the following full paging message may be directed to the particular subscriber unit). If a positive quick page has not been received, the subscriber unit returns to step 300. If a positive quick page has been received, the finger elements 208, decoder 214 and RF/IF unit 190 are activated at step 310, and the full page processed at step 312. In an alternative embodiment of the invention, the subscriber unit continues to search the samples for other pilots to find new signals to process when the next paging slot occurs. Additionally, if the quick paging channel was not received with sufficient quality, then step 310 is performed anyway to ensure that a full-page message is not missed.

By performing both the searching and quick page processing within searcher unit 206, the quick paging channel can be monitored without having to activate finger elements until a positive quick page is received. Generally, most quick page messages will be negative, indicating that no call or message is pending. Thus, the time the finger elements 208 and other circuitry are activated is significantly reduced. Therefore, reducing the circuitry used to perform quick page channel monitoring increases the standby time of the subscriber unit.

This reduction in circuitry is accomplished by taking advantage of the reduced coding level of the quick paging channel and quick page message and storing received samples for processing. The reduced coding allows the demodulation of the quick paging channel to be performed with a limited amount of demodulation functionality, and therefore with limited additional complexity in the searcher. Also, the use of sample RAM 204 allows multiple time offset demodulation to be performed using a single demodulation engine

within searcher 206, which further reduces the circuitry necessary to monitor for paging messages.

Additional power savings are realized by performing the search and page channel monitoring using stored samples. In one embodiment, the quick
5 paging channel is an uncoded binary phase shift keying (BPSK) or on-off-keying (OOK) bit sent once or twice. In particular, the time that the RF/IF unit 190 operates during each page cycle is reduced by storing the samples when they are generated. Once the samples are stored, the subscriber unit deactivates the RF/IF unit 190 to conserve power, and searches the samples repeatedly at
10 different offsets or different pilot signals, or both, using only the digital circuitry.

As noted above, performing different searches on the same samples allows the RF unit to turn off once the initial set of samples is gathered. Turning off the RF unit reduces the power consumption of the mobile during
15 idle mode. In contrast, if the samples were not stored, additional samples would have to be gathered for as long as it was necessary to search for the various pilot signals and time offsets. This continuous gathering of pilot data would require the RF unit to remain on, and therefore consuming power, for a longer period of time, which would reduce the stand-by time of the subscriber
20 unit.

The described embodiments of the invention provide performance enhancements as well as improved idle mode power consumption. In particular, by performing demodulation and searching on the same set of samples, the performance of the demodulation is improved. This is because
25 the best signals as measured by the pilot channel searching will be the best signals for paging channel demodulation because the set of samples are the same. In alternative systems, searching is performed on a first set of samples and the results of that searching are used to determine how to demodulate paging channels in a second set of samples. While the correspondence between the searching results and paging channel quality is typically reasonable if the
30 time span between the two events is small, any difference in the channel between the search and demodulation is virtually eliminated when compared to fading channel decorrelation time by conducting searching and demodulation on the same samples.

35 **Fig. 4** is a block diagram of searcher 206 when configured in accordance with one embodiment of the invention. The in-phase and quadrature phase samples are read from sample RAM 204 (Fig. 2) and despread by quadrature

phase shift keying (QPSK) despreader **402** using a pseudo random noise (PN) code from PN code generator **404**, where the PN code comprises an in-phase portion (PNI) and a quadrature phase portion (PNQ). The resulting in-phase and quadrature phase components from QPSK despreader **402** are applied to multipliers **406a - 406d**. Processing after the sample RAM **204** may happen at arbitrary clock frequencies, such as 19 MHz, that are unrelated to the original chip rate.

During search mode, Walsh code generators **408** and **410** generate the pilot channel Walsh code, which is applied to multipliers **406a - 406d**. Multipliers **406a - 406d** and accumulators **408a - 408d** operate together to discover the de-spread samples with the pilot Walsh code from Pilot Walsh code generators **408** and **410**.

The discovered pilot samples from accumulators **408a** and **408b** are applied to multipliers **420** twice: once directly and once via multiplexers **423**. By applying the discovered pilot samples twice, the result is that the discovered pilot samples are squared. The squared outputs are summed by a summer **422**. Thus, in search mode, the dot product of the discovered pilot data is calculated, and therefore the correlation energy of the pilot channel at the current offset is calculated.

Similarly, the discovered pilot samples from accumulators **408c** and **408d** are applied to square circuits **410**. The outputs of square circuits **410** are summed by a summer **412**. Thus, the operations by square circuits **410** and summer **412** act to calculate the dot product of the discovered pilot data with itself, and therefore the correlation energy of the pilot channel at the current offset.

The dot products from summers **412** and **422** are received by a local maxima calculator **414**. Local maxima calculator **414** determines the most likely offset, or offsets, from a set of offsets (or hypothesis) attempted by the searcher based on the correlation energy. For example, local max calculator **414** may save the local largest energy in a set of oversampled correlation energies in order to isolate the sample nearest to the true offset. Multipliers **406a** and **406b** and accumulators **408a** and **408b** operate together to discover the despread samples with the quick paging Walsh code from quick page Walsh code generator.

The set of offsets is generated as the timing of the PN and Walsh codes are adjusted relative to the samples. In an exemplary search, the PN and Walsh codes are adjusted in small increments around particular search regions.

Typically, the code generators are configured by a control system which also defines the search regions with a start offset and a finish offset. The control system may be a microprocessor or digital signal processor controlled by software stored in memory.

5 N-max tracker 416 collects the set of N largest correlation energies for the different search regions. N is an integer, advantageously in the range of 4 to 16. The use of other criteria for collecting search results, such as diversity of signal source, is consistent with the use of the invention. The resulting set of correlation energies and associated offsets (search results) is reported to the
10 control system.

In the exemplary embodiment of the invention, once the search operation has been performed, the control system configures the searcher to perform demodulation on the paging channel for a set of signals and offsets based on the search results. To perform demodulation of the page channel (advantageously
15 the quick page channel), Walsh generator 410 is configured to generate the paging channel Walsh code, and multiplexers 423 are configured to apply the output of accumulators 408c and 408d to multipliers 420. Additionally, accumulators 408a and 408b are configured to integrate exactly over the bit duration.

20 For each signal to be demodulated, the control system configures the PN generator and Walsh generators at the particular offset, and the samples are demodulated again. The quick paging channel recovered samples from accumulators 408a and 408b are applied to multipliers 420. Additionally, the pilot channel recovered samples are applied to multipliers 420 via muxes 423.

25 To perform the dot product of pilot and paging data, the outputs of multipliers 420 are added by adder 422, and the resulting projected quick paging channel soft decision data is received by latches 424. Various other methods for adjusting for carrier phase will be apparent including the use of a cross product operation or other phase rotation methods. The dot product
30 recovers the data that is in-phase with the pilots. Additionally, this data is weighted for combining. The output of latches 424 is then received by combiner accumulator 426. For each signal demodulated, accumulator 426 adds in the demodulation results. Once the set of signals is demodulated, the combined quick page data is output to the control system, which estimates the
35 data transmitted by making a hard decision based on the accumulated soft decision data. Based on the hard decision, it is determined whether a quick page has been sent.

Additionally, in one embodiment of the invention, the energy from the
discovered pilot channel data is calculated again by performing a dot product
operation, and the resulting pilot energy is accumulated for each signal by
accumulator 426. The accumulated pilot energy is forwarded to the control
5 system.

In one embodiment of the invention, the control system determines
whether to rely on the quick paging data based on the accumulated pilot
energy. If the accumulated pilot energy is above a certain threshold, then the
quick paging channel results are relied on. Otherwise, the next quick page slot
10 is processed, or the full paging channel is processed. As noted above, using the
same samples being used for the processing of the pilot and paging channels
ensures that the channel is the same for the two processings, which improves
demodulation performance.

The mobile station may receive pilot signals from several base stations at
15 the same time. One of the base stations with the strongest E_c/I_o may be
monitored by the mobile station. When a quick page message on a quick
paging channel (QPCH) is targeted for a mobile station, the quick page may be
transmitted via several base stations. Multiple transmissions of the quick page
are performed to assure that the mobile station receives at least one of the
20 messages. The mobile station may be monitoring the base station with the
strongest pilot E_c/I_o , and if the quick page message is at least transmitted via
the strongest base station, the mobile station detects the quick page message.
The actual page message is followed at some time later than the transmission
time of the quick page. The mobile station may be moving in the coverage area
25 or the channel condition changing at a rate such that when the actual page
message is arrived, the originally identified best base station is no longer the
best base station. As a result, the mobile station may fail to detect the actual
page message.

In order to improve efficiency of detecting a page message, according to
30 an embodiment of the invention, the mobile station keeps track of several base
stations as the best base stations. Referring to Fig. 5, pilot signal E_c/I_o over
time as received by a mobile station is shown. The signals 501-03 are
respectively from three different base stations. More base stations could be
used. However, for simplicity only three are shown. Each base station
35 transmits a QPCH message 521 to be received by a target mobile station. Note
that, at the time of QPCH message 521, the pilot E_c/I_o of signal 501 is higher
than other pilot E_c/I_o levels. Thus, the base station associated with the pilot

signal 501 is considered the best base station. The QPCH message 521 basically contains information that a paging message 522 is going to follow for the mobile station. The paging message 522 is followed at a determined time following the QPCH message timing.

- 5 In a synchronized system, QPCH message 521 may be transmitted by different base stations at substantially the same time. Considering the propagation delay and other factors, QPCH message 521 may also be received at the mobile station substantially at the same time. As a result, the paging message 522 following QCPH message 521 is also transmitted from different
10 base stations at substantially the same time, and received at substantially the same time. Note that, at the time of paging message 522, the base station associated with the pilot signal 501 may not be the best base station. If the mobile station limits the paging message detection to only the best base station as detected during the QPCH 521, the mobile station may fail to properly
15 decode the paging message.

- In order to solve the problem associated with the changes in the channel between the transmission time of the QPCH message 521 and the paging message 522, the mobile station tracks more than one base station as the best base station. The mobile station decides whether the E_c/I_o of the pilot signal of
20 different base stations during the QPCH message exceeds a threshold 510. Such a decision may be performed by control system 210 in connection with the operations performed by searcher 206 and finger elements 208 as described. If the E_c/I_o exceeds threshold 510, the mobile station monitors the paging message 522 transmitted from all the base stations that exceeded the threshold.

- 25 Monitoring multiple paging messages at the same time may be accomplished by several ways. One way is to assign at least a finger to signals arriving from each base station. If there is more than one signal path from a base station, more than one finger may be assigned to each base station. The results of the assigned fingers to a base station are summed in the form of the
30 data symbol energy. In order to sum the signal energies from different base stations, the results may need to be time aligned by time skewing the signal energies. The summed signal energies are applied to a decoder for decoding the paging message 522. The combined and de-skewed results of fingers assigned to a base station may pass through a de-interleaving process if the
35 signal at the transmitting base station has been passed through an interleaving process. Interleaving and de-interleaving processes are known in the relevant art. The results of de-interleaving processes associated with signals from each

base station pass through a decoding process for decoding the paging message 522. In a limited way, the signals from different base stations may be sampled and stored for a serial combining and decoding process.

In an alternative embodiment, the mobile station may keep track of several base stations as the best base stations for detecting paging message 522 independent of the QPCH messaging. The best base stations in the alternative embodiment may be pre-selected. The pre-selection may be based on criteria other than QPCH message reception or the pilot signal being above the threshold 510. For example, the mobile station may remain in approximately the same geographical areas in a low mobility situation. Therefore, the number of base stations surrounding the mobile station may remain constant. In this situation, the mobile station may wake up periodically based on an internal timing control to monitor the paging channel. If there is a paging message, the mobile station monitors the signals from all the pre-identified base stations.

The mobile station may wake up slightly ahead of time to search for pilot channels associated with the base stations that possibly carry a paging a message for the mobile station. The wake up time may be long after the QPCH timing but before the paging channel timing.

The mobile station may attempt to receive and decode paging channels transmitted from several base stations even though only one QPCH may have been detected during the QPCH timing. In such a situation, the mobile station, after detecting a QPCH from a base station, knows that most likely several base stations in the vicinity may send the page message. As such, the mobile station may limit its search during the QPCH channel to detection of only one QPCH. However, the mobile station advantageously continues to monitor several base stations for the actual page message. To select candidate base stations for detection of the paging message after detection of only one QPCH, the mobile station may wake up just before the paging channel timing as determined based on the detected QPCH timing for detecting pilot channels of the candidate base stations.

Thus, a system and method for performing page monitoring have been described. The previous description of specific embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is

CLAIMS

1. A system for receiving pages comprising:
 - 2 a searcher for detecting correlation energy of several pilot channels and for demodulating at least two quick paging channels;
 - 4 a control system coupled to said searcher for determining whether said correlation energy exceeds a threshold, thereby determining a number of best
 - 6 base stations;
 - a demodulation element coupled to said searcher for demodulating
 - 8 paging channels transmitted from said best base stations, wherein timing of said paging channels are substantially overlapping and based on timing of at
 - 10 least one of said quick paging channels.
2. The system as set forth in claim 1 further comprising:
 - 2 a combiner for soft combining paging messages received from said best
 - base stations;
 - 4 a decoder for decoding soft decision data from said demodulation
 - element.
3. The system as set forth in claim 1 further comprising:
 - 2 an RF unit for generating signal samples of at least one of said
 - several pilot channels, quick paging channels, and paging channels.
4. The system as set forth in claim 1 further comprising:
 - 2 a control unit for activating said searcher during quick page time slots
 - assigned to said system for receiving pages, and for activating said
 - 4 demodulating element during paging time slots identified by at least one of
 - said quick paging channels.
5. A method comprising:
 - 2 searching several pilot channels associated with several base
 - stations;
 - 4 selecting at least two base stations having associated pilot signal
 - energies exceeding a threshold;
 - 6 demodulating for paging channels transmitted by said at least two
 - base stations over substantially overlapping time slots.

6. The method as set forth in claim 5 further comprising
2 combining a result of said demodulating generated by each of said paging
channels.

7. A method for receiving a page comprising:
2 searching for pilot channels, yielding a set of detected pilot channels that
exceed a correlation energy threshold;
4 demodulating for paging channels generated from a set of base stations
corresponding to said detected pilot channels, wherein said paging channels are
6 transmitted over substantially overlapping time slots.

8. The method as set forth in claim 7 further comprising combining
2 data symbol energies of said paging channels.

9. The method as recited in claim 7 further comprising
2 demodulating at least a quick paging channel transmitted from a base
station in said set of base stations.

10. The method as recited in claim 9 wherein said searching is
2 performed at substantially the same time as said demodulating said quick
paging channel.

11. The method as recited in claim 7 wherein said searching is
2 performed at a time prior to said demodulating said paging channel.

ABSTRACT

A novel and improved method for performing paging is described. In one embodiment of the invention a searcher is used to detect spread spectrum signals. The searcher searches several pilot channels associated with several base stations. A controller selects at least two base stations that have associated pilot signal energies exceeding a threshold. A demodulator demodulates for paging channels transmitted by the at least two base stations. The paging channels are transmitted over substantially overlapping time slots. A combiner combines a result of the demodulation generated by demodulating each of the paging channels.

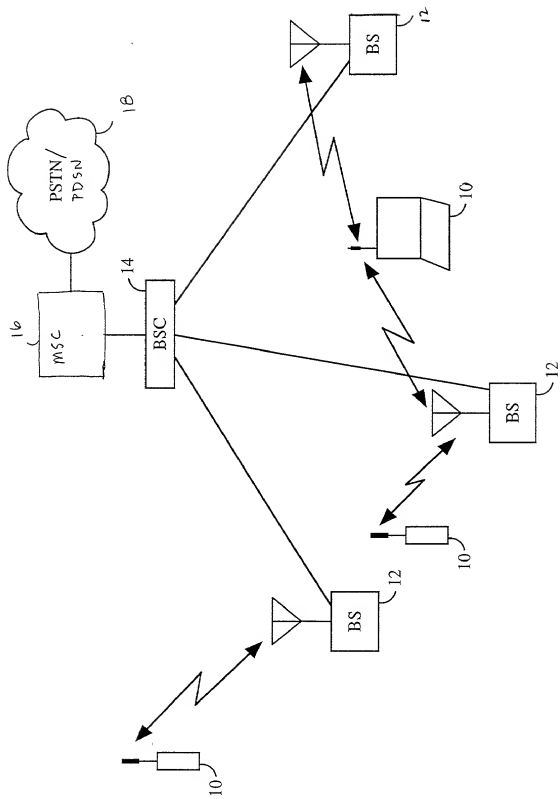


FIG. 1

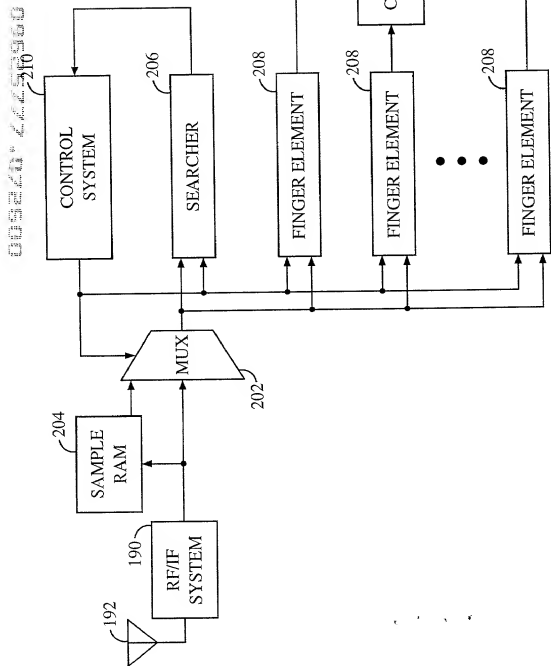


FIG. 2

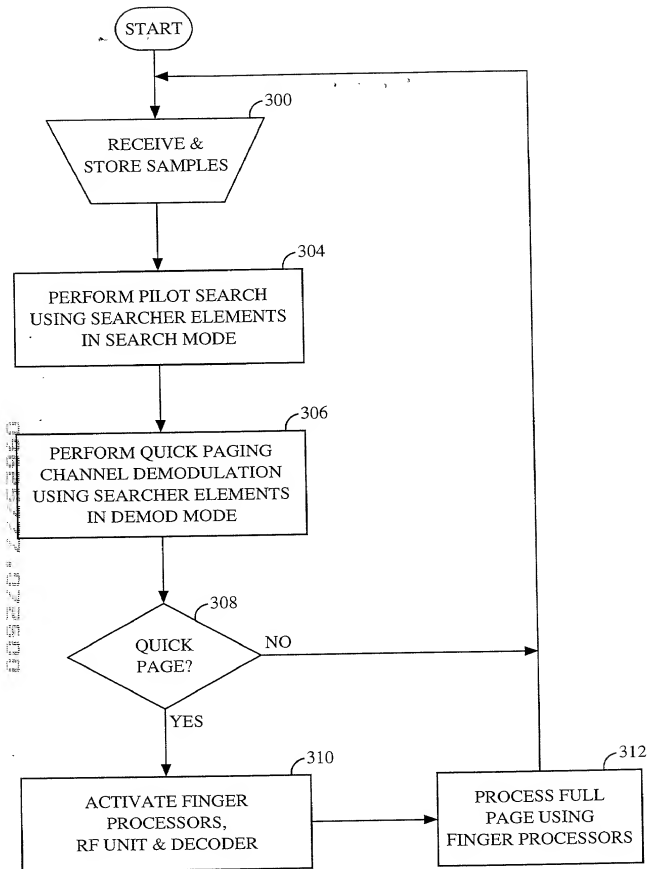


FIG. 3

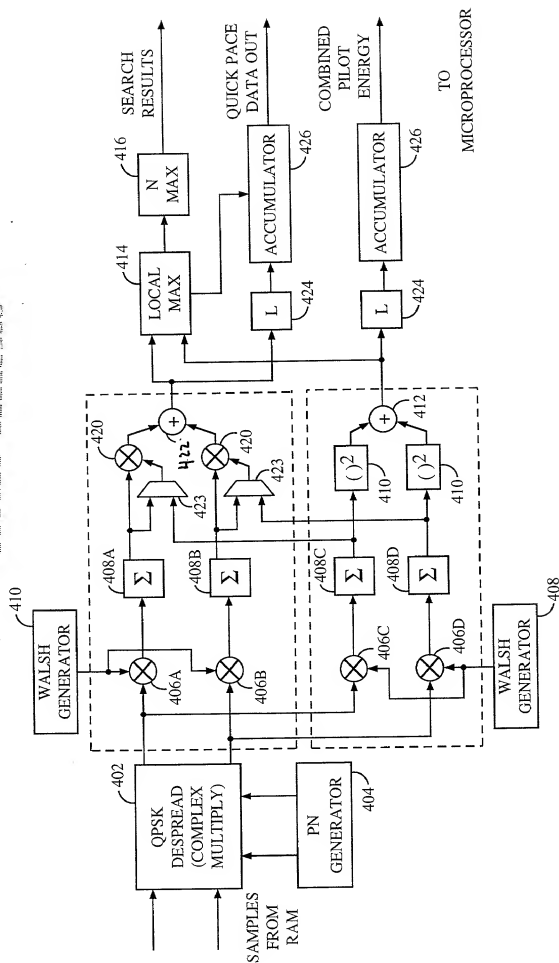


FIG. 4

COMBINED DECLARATION / POWER OF ATTORNEY

ATTORNEY DOCKET NO.: PA000330

AS BELOW NAMED INVENTOR, I HEREBY DECLARE THAT: This Declaration is of the following type:

- ☒ Original
 ☐ Supplemental
 ☐ Continuation-In-Part
 ☐ Divisional
 ☐ Continuation
 ☐ National Stage of PCT

My residence, post office address and citizenship are as stated below next to my name: I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention PAGE MONITORING METHOD AND APPARATUS the specification of which:

- ☒ is attached hereto.
 ☐ was filed on _____ as Serial No. _____
 ☐ was amended on _____ (if applicable).
 ☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Sec. 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

Priority Claimed

(Country)	(Application No.)	(Day/Month/Year/Filed)	(Yes)	(No)
-----------	-------------------	------------------------	-------	------

I hereby claim the benefit under Title 35 USC 120 of the United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 USC 112, I acknowledge the duty to disclose material information as defined in Title 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Serial No.)	(Filing Date)	(Status)
--------------	---------------	----------

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Russell B. Miller, Reg. No. 31,122, Gregory D. Ograd, Reg. No. 30,880, Bruce W. Greenhaus, Reg. No. 37,339, Charles D. Brown, Reg. No. 28,285, Thomas R. Rouse, Reg. No. 40,793, Kent D. Baker, Reg. No. 38,822, Thomas M. Thibault, Reg. No. 42,181, Tom Streeter, Reg. No. 32,007, Christopher O. Edwards, Reg. No. 36,127, Pavel Kalousek, Reg. No. 44,178, Kyong H. Macek, Reg. No. 42,977, Byron Yafuso, Reg. No. 45,244, Raymond B. Horn, Reg. No. 44,773, Kevin J. Clark, Reg. No. 42,421, Sean English, Reg. No. 37,319, Roger W. Martin, Reg. No. 39,291, Sandip S. Minhas, Reg. No. 44,945, Michael D. Hartogs, Reg. No. 36,547, Philip R. Wadsworth, Reg. No. 29,219 and S. Hossain Beladi, Reg. No. 42,311, Albert J. Harnois, Reg. No. 46,123. Please direct all telephone calls to Philip R. Wadsworth at (858) 651-4404 and address all correspondence to: Sarah Kirkpatrick, Manager, Intellectual Property Administration, QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Joint Inventor Tao Chen	Inventor Signature	Date
Residence 8826 La Cartera, San Diego, California 92129		Citizenship China
Post Office Address 8826 La Cartera, San Diego, California 92129		

Full Name of Second or Joint Inventor Jun Wang	Inventor Signature	Date
Residence 13410 Appalachian Way, San Diego, California 92129	Citizenship China	
Post Office Address 13410 Appalachian Way, San Diego, California 92129		
Full Name of Third or Joint Inventor Edward G. Tiedemann, Jr.	Inventor Signature	Date
Residence 4350 Bromfield Avenue, San Diego, California 92122	Citizenship USA	
Post Office Address 4350 Bromfield Avenue, San Diego, California 92122		